




## C4BF BNC/Female 1 Watt Termination 4 GHZ

Rev 000

<b>Electrical</b>	
Frequency	0-4 GHz
VSWR	1.20 Max
Impedance	50 Ohms
Power Handling	1 Watt
<b>Mechanical</b>	
BNC Interface per	MIL-STD-348B
Operating Temperature	-45°C to +85°C
<b>Materials</b>	
Body	Tri-Alloy Plated Brass
Contacts	BeCu
Contact Plating	Au 30μ" Min
Dielectric	PTFE
ROHS Compliant	



### Outline

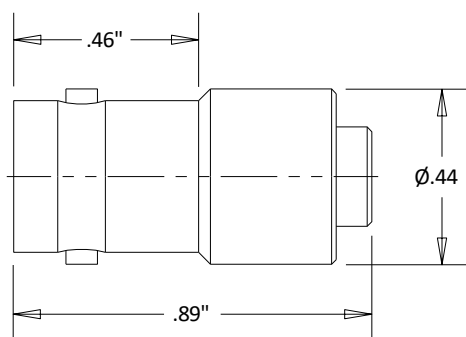

#### Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

### Typical Data

